



# D520ST/D525ST

## Short-Throw SVGA/XGA Versatile Digital Projectors

- DLP<sup>®</sup> Technology for Crisp Image Quality
- Enhanced Color and Display Adjustments
- 2600 Lumens Brightness/2300:1 Contrast Ratio

# D520ST/D525ST Short Throw SVGA/XGA

Designed for smaller environments with large screen display needs, the Vivitek D5 Series of short-throw digital projectors is an ideal presentation solution. The D520ST and D525ST offer a combination of easy-to-use functionality and flexibility to adapt to a variety of settings.

## Vivitek D520ST/D525ST Data Projectors

	D520ST	D525ST
Display Technology	0.55" single-chip DMD	0.55" single-chip DMD
Resolution	Native SVGA (800 x 600)	Native XGA (1024 x 768)
Brightness	2600 ANSI Lumens	2600 ANSI Lumens
Contrast Ratio	2300:1	
Zoom & Focus	Manual Zoom/Focus	
Lens Throw Ratio	1.93 ~ 2.16	
Projection Screen Size	23"-300"	
Remote Control	Business Card Sized Remote Control	
Lamp	240W (STD), 180W (ECO)	240W (STD), 180W (ECO)
Aspect ratio	Native (4:3) & Compatibility (16:9)	
PC Compatibility	VGA, VXGA, SVGA, XGA, SXGA, UXGA, Macintosh	
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM	
I/O Ports	HDMI v1.3 x1, VGA-Input (15pin D-Sub) x1, S-Video x1, Composite Video (RCA) x1, Audio Mini-Jack x1, RS-232c x1, Stereo Audio (RCA) x1, VGA-Output (15 pin D-Sub) x1	
Keystone Correction	Vertical (+/- 15 degrees)	
Noise Level	35 dB (Standard Mode), 29dB (Eco-Mode)	
Speaker	1W Mono	
Projection Method	Front, Rear, Table Top and Ceiling Mount	
Dimensions (WxHxD Inches)	10.3" x 3" x 7.8" (261 x 78x 97mm)	
Weight	4.2 lbs (19 kg)	
Power Supply	AC 100-240V	
Power Consumption	300W(STD) <1W Standby Power	300W(STD) <1W Standby Power
OSD Language	English/French/German/Italian/Spanish/Korean/Russian Simplified Chinese/Traditional Chinese/ Norwegian Czechoslovak/Portuguese/Polish/Swedish/Greek/Dutch Danish/Turkish/Arabic/Hungarian/Finnish	

\* Specifications are subject to change without prior notice.

### Projection Distance D520ST

Screen size (inch)	Projection Distance Tele (M)	Height (M)	Screen size (inch)	Projection Distance Wide (M)	Height (M)
30	0.55	0.06	40	0.73	0.09
80	1.46	1.17	80	1.46	0.17
100	1.83	0.21	100	1.83	0.21
120	2.19	0.26	120	2.19	0.26
150	2.74	0.32	150	2.74	0.32
200	3.66	0.43	200	3.66	0.43
300	5.49	0.64	300	5.49	0.64

### D525ST

Screen size (inch)	Projection Distance Tele (M)	Height (M)	Screen size (inch)	Projection Distance Wide (M)	Height (M)
30	0.6	0.06	40	0.73	0.09
80	1.61	1.17	80	1.46	0.17
100	2.01	0.21	100	1.83	0.21
120	2.41	0.26	120	2.19	0.26
150	3.02	0.32	150	2.74	0.32
200	4.02	0.43	200	3.66	0.43
300	6.04	0.64	300	5.49	0.64

The above numbers are approximate and may be slightly different from the actual measurements

### Dimension



► **Enhanced Wall Color Adjustment:**  
Adjusts the picture quality to complement the surface color of the projected image


► **Color Adjustment:**  
Adjusts up to seven (7) colors (RGBCMYW); Adjustments contain Hue/Saturation/Gain from 0 to 100 for the best possible image

► **Pre-set Enhanced Display Mode:**  
Create the optimum picture from seven (7) display modes (Presentation, Bright, Game, Movie, TV, sRGB and User)

► **Presentation Timer:**  
Manages presentations with a user-friendly, built-in timer

► **Keypad Lock:**  
Prevent accidental system adjustments to the projector

► **3:2/2:2 Pulldown:**  
Eliminates jagged images from interlaced video and ensures crisp, clean images

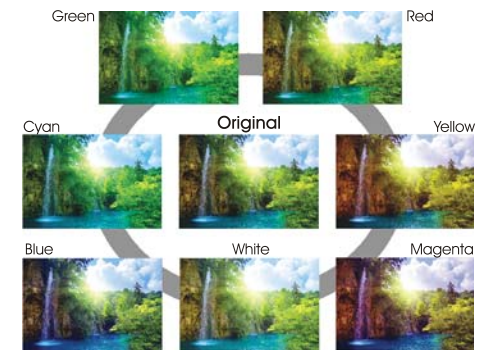

► **Energy Saving:**  
Uses less than 1W of power in Standby Mode.

### I/O Connectivity



Vivitek Corporation

© 2009 Vivitek Corporation, Values, Weights and Dimensions shown are approximate. Errors and omissions accepted. Specification are subject to change without prior notice. This product maybe subject to export regulations. Vivitek is trademark of Vivitek Corporation. Projection images simulated.